POZNÁMKY:
- Hlavní napájení, kabeláž a rozvody předmětem MAR.
- Požadované hlavní napájení: 400 V, 3 fáze, 50 Hz + nula + uzemnění.
- Předpokládaný maximální výkon: 3,5 kW.
- Displeje jsou dodávány s ochranným krytem.
- Všechny elektrické kabely musí být značeny.
- V době uvedení do provozu musí být k dispozici internetové připojení.
- Je třeba zajistit kabely mezi ovládací skříní a displeji, ovládacím panelem a světelným a zvukovým signálem. Vlastní zapojení provede dodavatel pohyblivého dna.
- Kabely mezi ovládací skříní, hydro-unit a válcem zajistí a připojí dodavatel pohyblivého dna.

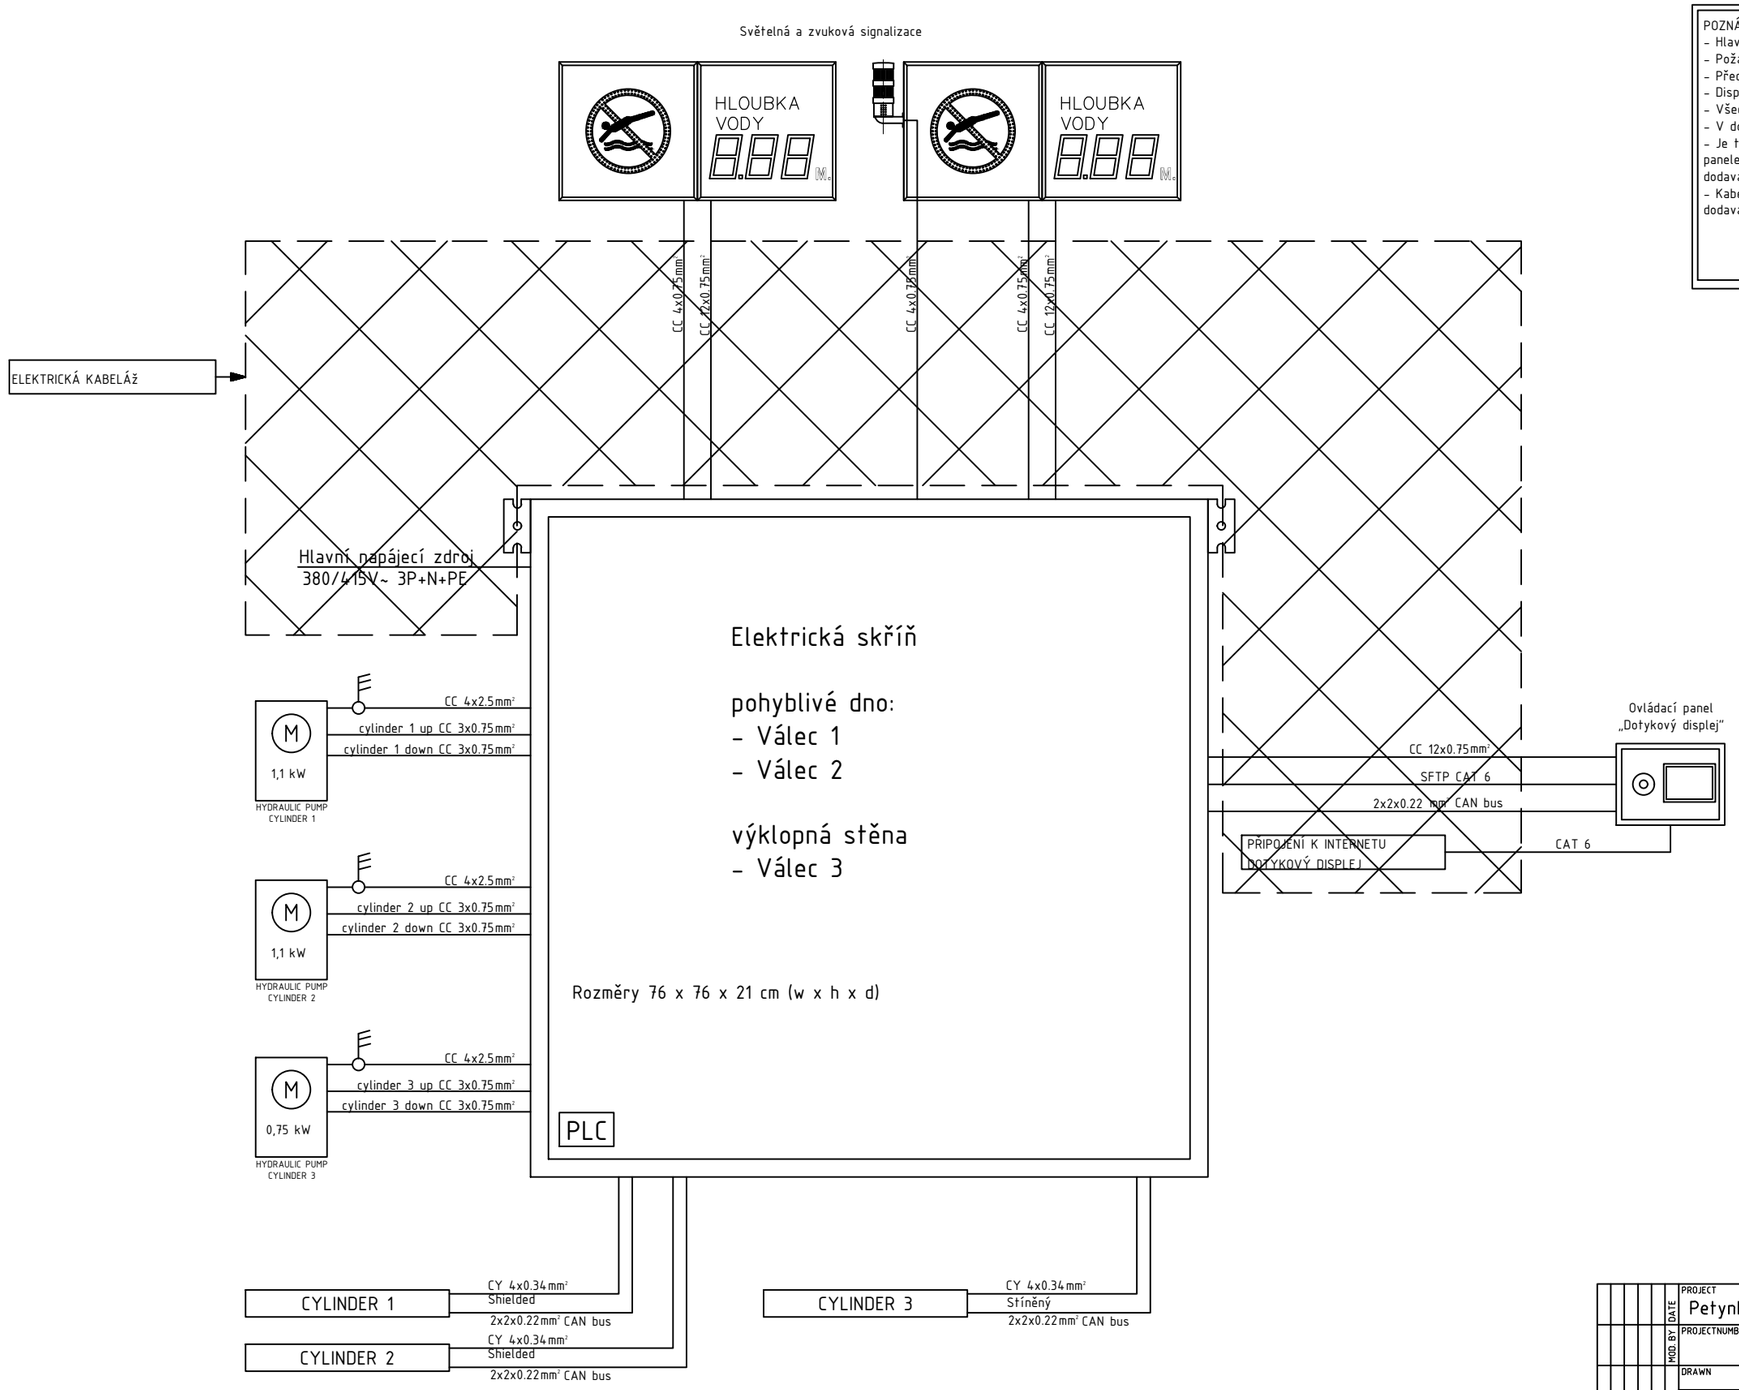

KONCEPT

PROJECT	Petynka Prague - CZ	VARIO POOL THE REAL DEPTH INVESTMENT	
PROJECTNUMBER	Pxxxxxx	Haarspit 3, 1724 BG Oudkarspel, The Netherlands	tel. +31 - (0)226 - 333 000, fax +31 - (0)226 - 333 099, E-mail: info@variopool.nl
DRAWN	DWE		
DATE	20-01-2025	UNIT OF MEASURE: mm	COPY FROM / RELATED TO: -
CHECKED	-	COPYRIGHT OF VARIOPOOL. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR USED IN ANY WAY WITHOUT THE APPROVAL OF VARIOPOOL WHOSE PROPERTY IT REMAINS.	PROJECTION: DRAWING AND MANUFACTURING STANDARDS ACCORDING TO ISO UNLESS SPECIFIED OTHERWISE
DATE			FORMAT: A1
NAME OF DRAWING	Electrical diagram		SCALE: NVT
DRAWING NO.	GA-40		ISSUE: 0 / PAGE: 1/1

DATE | MOD. BY | MODIFICATION | ISSUE