


MOON MEDIUM

Impact resistant polycarbonate diffuser. Built-in driver.

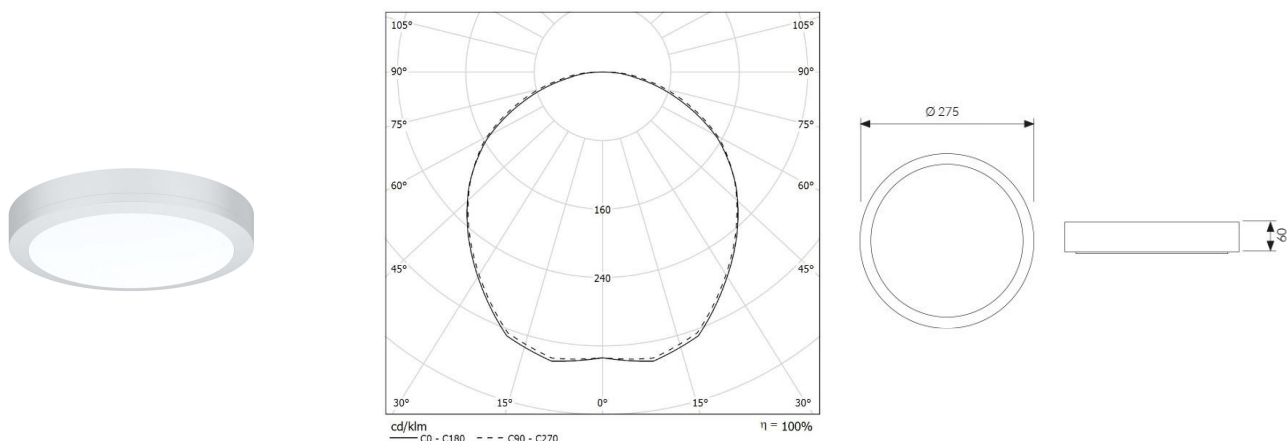

CODE		FLUX	SIZE	CERTIFICATIONS
51PO18L4M65	18W 4000K	2014lm	Ø 275mm	CE IP65 LED ENERGY EFFICIENCY CLASS E

Optics

Impact resistant polycarbonate diffuser.

Body

Polycarbonate.

Technical features

- SMD LED technology
- Built-in driver
- CRI >80
- Eye safety: RG0
- Mac Adams 3
- L80/B10 >50.000h
- -25°-> +40°/45°
- 750°: resistant to glow wire test
- 5 years warranty

Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Colors

White RAL 9003 - code B

Black RAL 9005 - code C8

Other Colors - on request

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97