
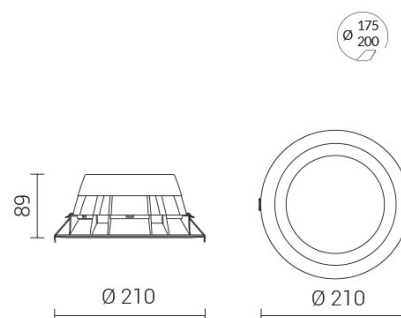


HALL LED ESSENTIAL Medium

IP54 protection from the bottom

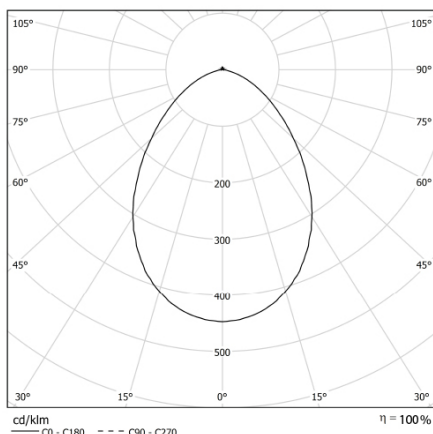

CODE		FLUX	SIZE	CERTIFICATIONS
38MP14K4M54	14W 4000K	2031lm	210mm	CE IP 54 LED ENERGY EFFICIENCY CLASS 

Optics

Microcell polycarbonate internal reflector and opal microprism polycarbonate diffuser UGR<19. Cut-off>10°.

Body

Polycarbonate, with heat sink in die-cast aluminum.

Technical features

- SMD LED technology
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B20 >80.000h
- 5 years warranty

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Colors

White RAL 9003 - code B

Black RAL 9005 - code C8

Other Colors - on request

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97

