
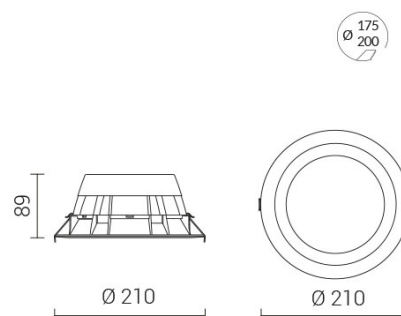


## HALL LED ESSENTIAL Medium

IP54 protection from the bottom

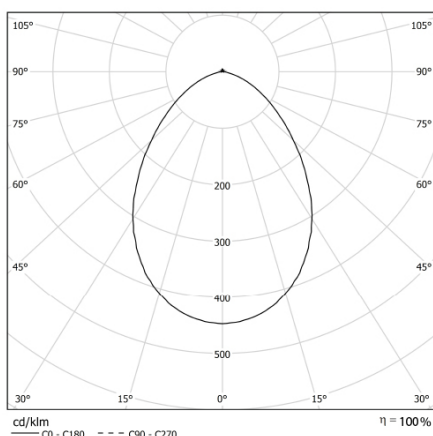

CODE		FLUX	SIZE	CERTIFICATIONS
38MP9K4M54	9W 4000K	1469lm	210mm	CE IP 54 LED ENERGY EFFICIENCY CLASS 

### Optics

Microcell polycarbonate internal reflector and opal microprism polycarbonate diffuser UGR<19. Cut-off>10°.

### Body

Polycarbonate, with heat sink in die-cast aluminum.

### Technical features

- SMD LED technology
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B20 >80.000h
- 5 years warranty

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Colors

White RAL 9003 - code B

Black RAL 9005 - code C8

Other Colors - on request

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97

